
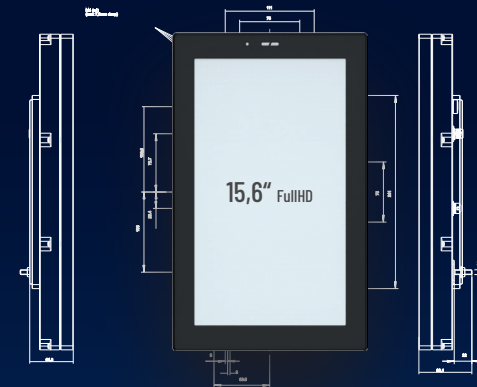
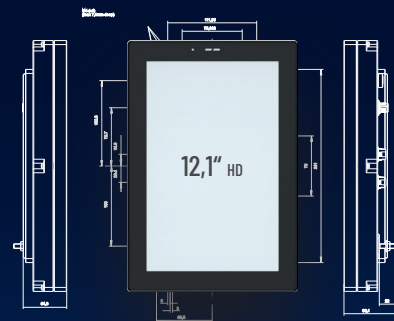
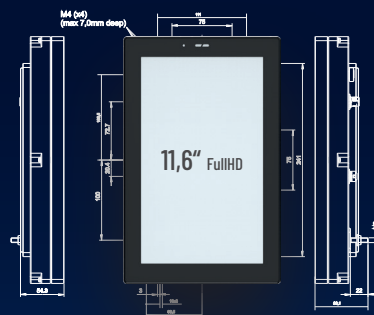


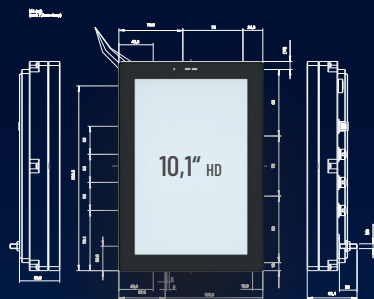

eiCAM. This. Changes. Everything.

Learn more about SIL2 H.265 Ethernet Camera Systems

A&RTECH

	Rear View Monitors			
Display	10.1” IPS	11.6” IPS	12.1” IPS	15.6” IPS
Brightness	1000 cd/m²	1200 cd/m²	1500 cd/m²	1500 cd/m²
MTTH	100,000 h	70,000 h	100,000 h	50,000 h
Weight	< 3 kg			< 4 kg
Resolution	1280x800	1920x1080	1280x800	1920x1080
DRAM	4 GB DDR4 @ 2400 MBit/s with ECC			
Non-volatile Memory	eMMC 16GB/32GB MLC FRAM: 1 Mbit			
OS	Linux			
Touch	None			
Power Supply	24 – 110 VDC according to EN 50155 class S2 and C1.			
Standards	EN50155, EN50121, EN60068, EN61373, EN60529, EN50128, EN50129, EN50657			
Safety Integrity Level	BI/SIL2			
Operating Temperature Range	-40°C – +70°C acc. to EN 50155 class TX/OT4			
Protection Front/Back panel	IP65/IP30			
Interfaces				
Analog Video (CCTV)	Input: 2 input channels PAL formats: B, G, H, I, D NTSC formats: M			
Digital Video (Streaming)	H.264, H.265, MJPEG Up to 8 streams in parallel Up to 1920x1080 resolution @ 30 FPS Dynamic Video Cropping, Scaling and Rotation			
Ethernet Interface	1 interface supporting 10/100MBit/s, Half- or Full duplex, Auto-Crossing, Auto-Negotiation			
Digital IO	Digital Input: 2x SIL2 / 4x BI			